


Product Range: Mineral Contours

Product Name: Mineral Sands | **Size:** 230 x 110 x 76mm | **Manufactured:** QLD





Typical Properties	
Length (mm)	230mm
Width (mm)	110mm
Height (mm)	76mm
Dimensional Category	DW2
Average Weight / Unit (kg)	2.5
Units per Square Metre	48.5
Pack Size	520
Characteristic Unconfined Compressive Strength (f'uc) MPa	>15
Maximum Cold Water Absorption (%)	<9
Initial Rate of Absorption (IRA) (kg/m ² min)	1.0 - 3.0
Coefficient of Expansion e'Factor (mm/m)	<1.0
Core Volume (%)	<38
Liability to Efflorescence	Slight
Lime Pitting Liability	Nil
Solar Absorptance Rating	-
Durability Class	Exposure Grade

This Data represents average results from commercial production lots.
 If specific test results are required, sample should be taken from current production lots.
 AUSTRALIAN STANDARD TEST METHODS AS/NSZ 4456 ARE USED AS APPLICABLE.
 October 2020

Product Range: Mineral Contours

Product Name: Mica Grey | **Size:** 230 x 110 x 76mm | **Manufactured:** QLD

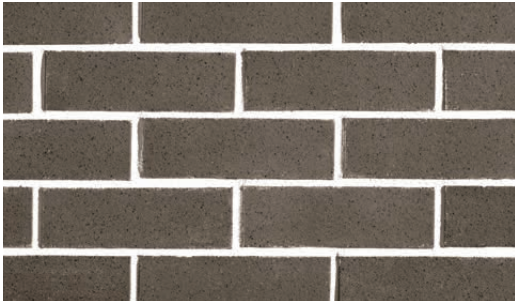


Typical Properties	
Length (mm)	230mm
Width (mm)	110mm
Height (mm)	76mm
Dimensional Category	DW2
Average Weight / Unit (kg)	2.5
Units per Square Metre	48.5
Pack Size	520
Characteristic Unconfined Compressive Strength (f'uc) MPa	>15
Maximum Cold Water Absorption (%)	<9
Initial Rate of Absorption (IRA) (kg/m ² min)	1.0 - 3.0
Coefficient of Expansion e'Factor (mm/m)	<1.0
Core Volume (%)	<38
Liability to Efflorescence	Slight
Lime Pitting Liability	Nil
Solar Absorptance Rating	-
Durability Class	Exposure Grade

This Data represents average results from commercial production lots.
 If specific test results are required, sample should be taken from current production lots.
 AUSTRALIAN STANDARD TEST METHODS AS/NSZ 4456 ARE USED AS APPLICABLE.
 October 2020

Product Range: Mineral Contours

Product Name: Gypsum Tan | **Size:** 230 x 110 x 76mm | **Manufactured:** QLD




Typical Properties	
Length (mm)	230mm
Width (mm)	110mm
Height (mm)	76mm
Dimensional Category	DW2
Average Weight / Unit (kg)	2.5
Units per Square Metre	48.5
Pack Size	520
Characteristic Unconfined Compressive Strength (f'uc) MPa	>15
Maximum Cold Water Absorption (%)	<9
Initial Rate of Absorption (IRA) (kg/m ² min)	1.0 - 3.0
Coefficient of Expansion e'Factor (mm/m)	<1.0
Core Volume (%)	<38
Liability to Efflorescence	Slight
Lime Pitting Liability	Nil
Solar Absorptance Rating	-
Durability Class	Exposure Grade

This Data represents average results from commercial production lots.
 If specific test results are required, sample should be taken from current production lots.
 AUSTRALIAN STANDARD TEST METHODS AS/NSZ 4456 ARE USED AS APPLICABLE.
 October 2020

Product Range: Mineral Contours

Product Name: Feldspar Taupe | **Size:** 230 x 110 x 76mm | **Manufactured:** QLD



Typical Properties	
Length (mm)	230mm
Width (mm)	110mm
Height (mm)	76mm
Dimensional Category	DW2
Average Weight / Unit (kg)	2.5
Units per Square Metre	48.5
Pack Size	520
Characteristic Unconfined Compressive Strength (f'uc) MPa	>15
Maximum Cold Water Absorption (%)	<9
Initial Rate of Absorption (IRA) (kg/m ² min)	1.0 - 3.0
Coefficient of Expansion e'Factor (mm/m)	<1.0
Core Volume (%)	<38
Liability to Efflorescence	Slight
Lime Pitting Liability	Nil
Solar Absorptance Rating	-
Durability Class	Exposure Grade

This Data represents average results from commercial production lots.
 If specific test results are required, sample should be taken from current production lots.
 AUSTRALIAN STANDARD TEST METHODS AS/NSZ 4456 ARE USED AS APPLICABLE.
 October 2020